


UNIBEL



Brass, Aluminium, Nickel Plated, Stainless Steel, Cable Gland
BS 6121, PART 1 : 1989



A-2 CABLE GLAND




STANDARD

B.S.6121, Part - 1 : 1989
IP 65

APPLICATION

INDUSTRIAL GLAND

For use with all types of unarmoured cable.

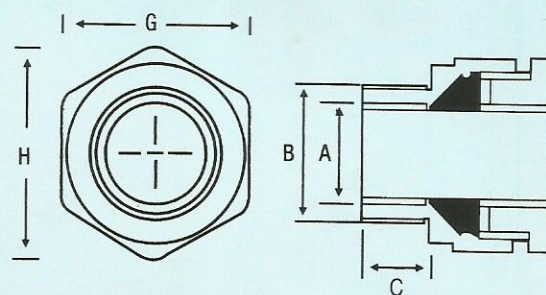

GLAND SIZE	DIA. B	MINIMUM LGTH. OF THREAD C	DIAMETER (MAX) - (MIN) A	ACROSS FLAT G	ACROSS CORNER H
A2 20 S	20	15	10.80 - 8.00	21.0	24.0
A2 20 L	20	15	14.70 - 11.00	22.0	25.0
A2 25 S	25	15	16.00 - 12.00	24.0	26.6
A2 25 L	25	15	20.30 - 13.00	28.0	31.5
A2 32 S	32	15	23.00 - 16.50	30.0	33.3
A2 32 L	32	15	26.20 - 19.00	38.0	41.0
A2 40 S	40	20	29.00 - 23.00	41.0	45.5
A2 40 L	40	20	34.00 - 26.00	45.0	50.0
A2 50 S	50	20	41.00 - 32.00	46.0	51.0
A2 50 L	50	20	45.00 - 36.00	59.0	65.0
A2 63 S	63	20	50.80 - 43.00	64.0	70.0
A2 63 L	63	20	56.50 - 48.00	70.0	77.0
A2 75 S	75	20	62.00 - 55.00	75.0	83.0
A2 75 L	75	20	68.50 - 61.00	84.0	93.0
A2 90	90	20	80.00 - 67.00	90.0	100.0
A2 100	100	24	90.00 - 86.00	119.5	132.0
A2 110	110	24	100.00 - 96.00	143.0	128.5

CW CABLE GLAND



STANDARD


B.S.6121, Part - 1 : 1989
IP 65

APPLICATION

Outdoor or Indoor, for use with
all types of SWA Cables

MECHANICAL

Provides retention of Armour or
Brand Impact Resistant

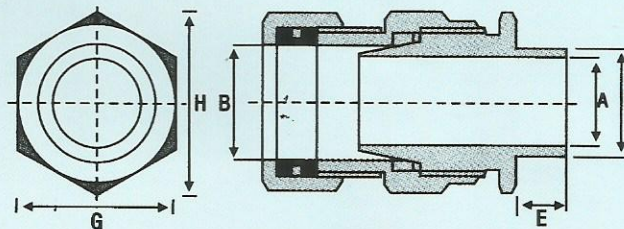

GLAND SIZE	ENTRY THREAD		CABLE ACCEPTANCE DETAIL			ACROSS FLAT G	ACROSS CORNER H
	DIA. D	LENGTH MINIMUM E	DIA. MIN. MAX. A	DIA. MIN. MAX. B	ARMOUR DIAMETER		
20S	20	10	8.0 - 11.8	12.9 - 17.2	0.9 / 1.25	24.0	27.0
20L	20	10	11.0 - 14.0	15.5 - 20.8	0.9 / 1.25	27.7	31.0
25S	25	10	12.0 - 17.0	17.5 - 24.0	1.25 / 1.60	31.5	35.0
25L	25	10	13.0 - 20.3	24.0 - 27.2	1.25 / 1.60	35.0	39.0
32S	32	10	17.0 - 24.0	25.0 - 31.0	1.60 / 2.00	43.0	47.5
32L	32	10	19.0 - 26.2	26.7 - 34.0	1.60 / 2.00	43.0	47.5
40S	40	15	23.0 - 30.0	31.0 - 38.5	1.60 / 2.00	51.5	57.0
40L	40	15	25.0 - 32.2	33.0 - 40.5	1.60 / 2.00	51.5	57.0
50S	50	20	31.5 - 38.2	39.4 - 46.8	2.00 / 2.50	58.5	65.0
50L	50	20	36.5 - 44.0	45.7 - 53.2	2.00 / 2.50	66.0	73.0
63S	63	20	42.5 - 50.0	52.1 - 59.0	2.50	72.0	80.0
63L	63	20	49.1 - 56.0	58.4 - 66.0	2.50	80.0	89.0
75S	75	20	54.5 - 62.0	64.8 - 72.0	2.50	86.5	97.0
75L	75	20	60.5 - 68.0	71.1 - 78.0	2.50	94.0	105.0
90S	90	20	66.0 - 76.0	77.0 - 86.0	2.50 / 3.15	106.0	118.0
90L	90	20	66.0 - 76.0	77.0 - 86.0	2.50 / 3.15	106.0	118.0

BW CABLE GLAND



STANDARD

B.S.6121, Part - 1 : 1989

APPLICATION


Dry Indoor, for use with all types of SWA Cables

FUNCTION

Provides for Armour Clamp Only


MECHANICAL

Provides retention of Armour or Brand Impact Resistant

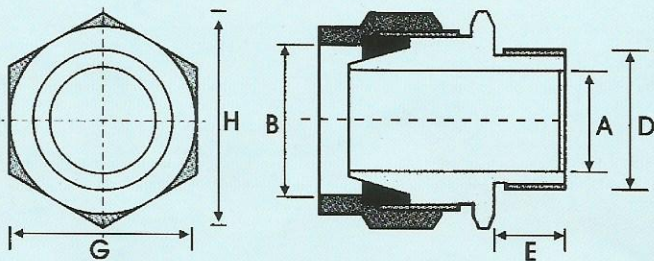

GLAND SIZE	ENTRY THREAD		CABLE ACCEPTANCE DETAIL			ACROSS FLAT G	ACROSS CORNER H
	DIA. D	LENGTH MINIMUM E	DIA. MAX. A	DIA. MAX. B	ARMOUR DIAMETER		
20S	20	10	11.8	17.2	0.9/1.25	23.5	26.5
20L	20	10	14.0	20.8	0.9/1.25	27.2	30.5
25S	25	10	18.5	24.0	1.25/1.60	31.5	35.0
25L	25	10	20.3	27.2	1.25/1.60	35.0	39.0
32S	32	10	24.0	31.0	1.60/2.00	41.0	45.0
32L	32	10	26.2	34.0	1.60/2.00	43.0	47.5
40S	40	15	30.0	38.5	1.60/2.00	48.0	53.5
40L	40	15	32.2	40.5	1.60/2.00	51.5	57.0
50S	50	15	38.2	46.8	2.00/2.50	58.5	65.0
50L	50	15	44.0	53.2	2.00/2.50	64.0	71.0
63S	63	15	50.0	59.0	2.50	72.0	80.0
63L	63	15	56.0	66.0	2.50	79.0	88.0
75S	75	17	62.0	72.0	2.50	86.5	97.0
75L	75	17	68.0	78.0	2.50	94.0	105.0
90L	90	20	79.0	90.0	2.50/3.15	105.0	117.0

ADAPTORS & REDUCERS

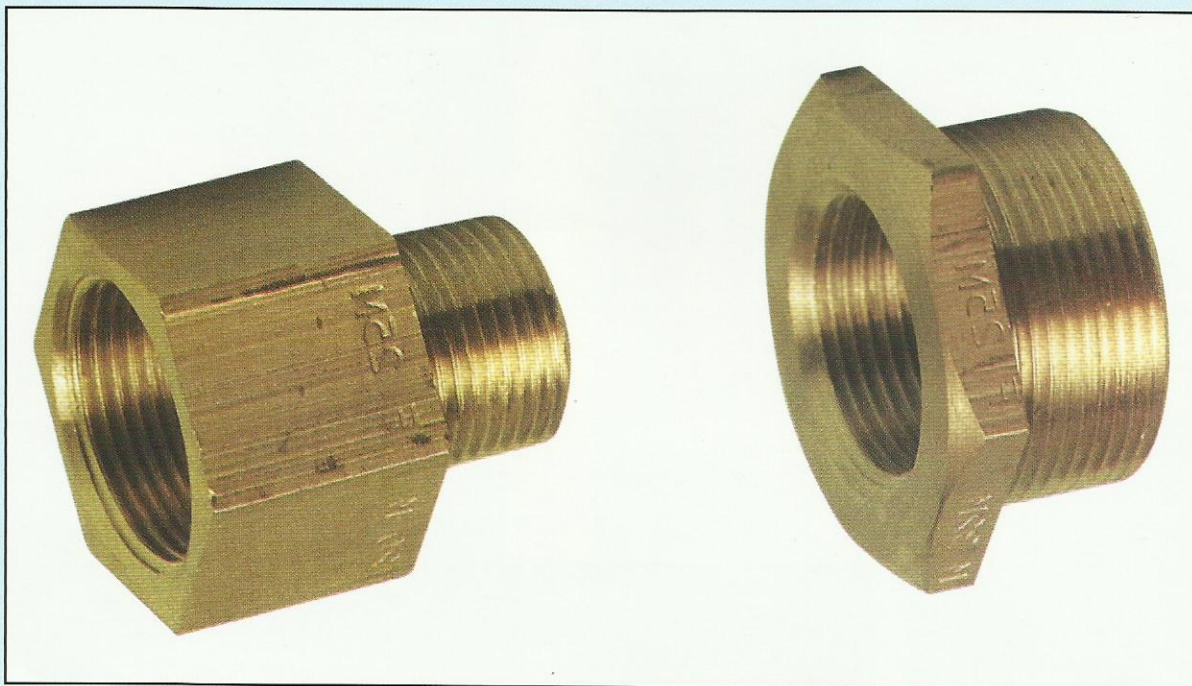

- **MATERIALS : BRASS**
- **AVAILABLE THREAD SIZES:**

METRIC

M16

M20

M25

M32

M40

M50

M63

M75

NPT

1/2"

3/4"

1"

1 1/4"


1 1/2"

2"

2 1/2"

3"

EARTH TAGS & LOCKNUTS

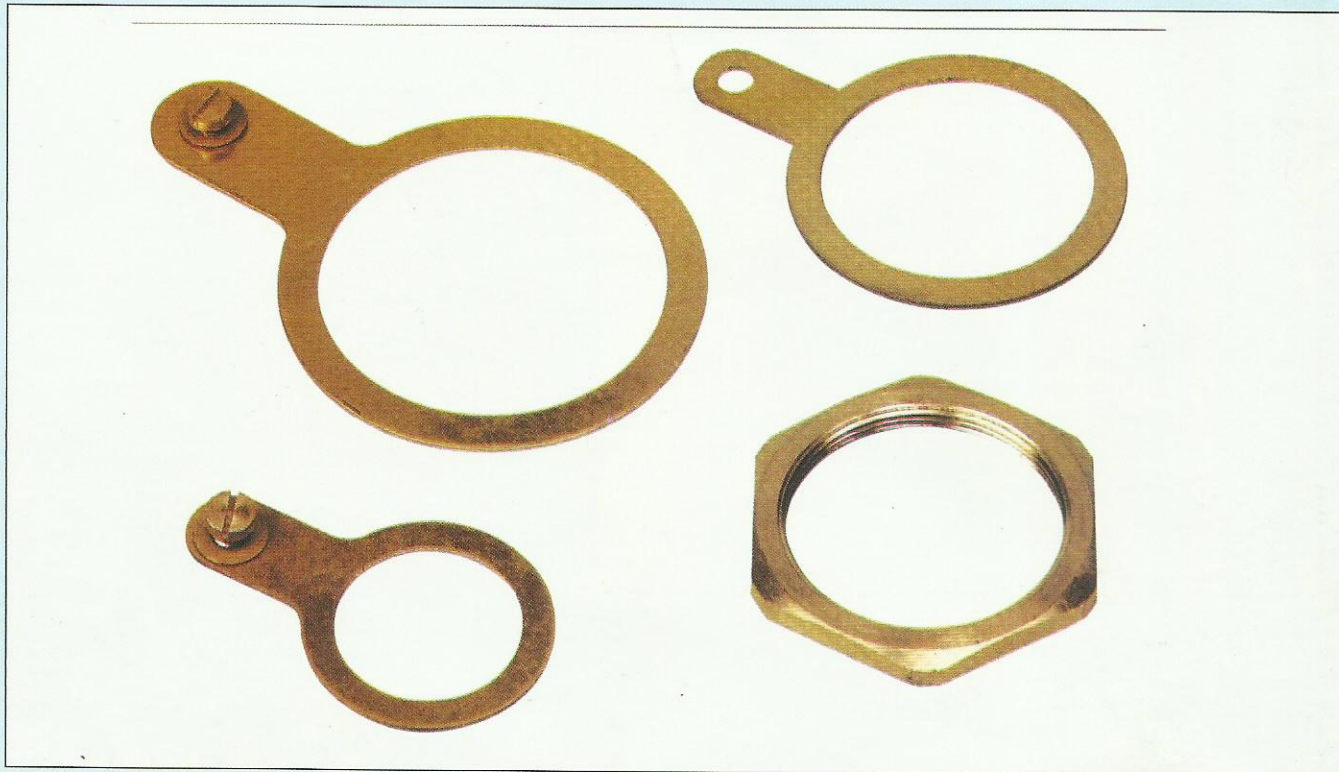

SHROUDS

